

## Data sheet

3RK1304-5LS40-4AA0



Figure similar

ET 200pro DSE ST DOL starter Standard Mechanical switching Electronic overload protection AC-3, 5.5 kW / 400 V 1.50 A...12.00 A without brake contact Han Q4/2 - Han Q8/0

product brand name	SIMATIC
product designation	Motor starters
design of the product	direct starter
product type designation	ET 200pro
<b>General technical data</b>	
product function on-site operation	Yes
insulation voltage rated value	400 V
degree of pollution	3
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation between main and auxiliary circuit	400 V
shock resistance	15g / 11 ms
vibration resistance	2g
mechanical service life (operating cycles) of the main contacts typical	30 000 000
type of coordination	1
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/01/2012
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7 Lead titanium zirconium oxide - 12626-81-2 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol - 119-47-1
<b>Net Weight</b>	1.674 kg
product function	
• direct start	Yes
• reverse starting	No
product component motor brake output	No
product feature	
• brake control with 230 V AC	No
• brake control with 400 V AC	No
• brake control with 24 V DC	No
• brake control with 180 V DC	No
• brake control with 500 V DC	No
product function short circuit protection	Yes
design of short-circuit protection	fuse
maximum short-circuit current breaking capacity (Icu)	
• at 400 V rated value	100 000 A
<b>Safety related data</b>	
proportion of dangerous failures	

• with low demand rate according to SN 31920	50 %
• with high demand rate according to SN 31920	75 %
<b>B10 value with high demand rate according to SN 31920</b>	1 000 000
<b>failure rate [FIT] with low demand rate according to SN 31920</b>	100 FIT
IEC 61508	
T1 value for proof test interval or service life according to IEC 61508	20 a
Electrical Safety	
<b>touch protection against electrical shock</b>	finger-safe
<b>Main circuit</b>	
number of poles for main current circuit	3
design of the switching contact	electromechanical
adjustable current response value current of the current-dependent overload release	1.5 ... 12 A
type of the motor protection	solid-state
type of voltage	AC
operating voltage rated value	200 ... 400 V
operating range relative to the operating voltage at AC at 50 Hz	200 ... 440 V
<b>operational current</b>	
• at AC at 400 V rated value	12 A
• at AC-3 at 400 V rated value	12 A
<b>operating power</b>	
• at AC-3 at 400 V rated value	5 500 W
operating power for 3-phase motors at 400 V at 50 Hz	700 ... 5 500 W
<b>Inputs/ Outputs</b>	
<b>product function</b>	
• digital inputs parameterizable	No
• digital outputs parameterizable	No
<b>number of digital inputs</b>	0
<b>number of sockets</b>	
• for digital output signals	0
• for digital input signals	0
<b>Supply voltage</b>	
<b>type of voltage of the supply voltage</b>	DC
<b>supply voltage 1 at DC</b>	24 ... 24 V
<b>supply voltage 1 at DC rated value</b>	
• minimum permissible	20.4 V
• maximum permissible	28.8 V
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	DC
<b>control supply voltage at DC rated value</b>	20.4 ... 28.8 V
<b>control supply voltage 1 at DC rated value</b>	20.4 ... 28.8 V
<b>control supply voltage 1 at DC</b>	24 ... 24 V
<b>power loss [W] in auxiliary and control circuit</b>	
• in switching state OFF	
— with bypass circuit	1.6416 W
— without bypass circuit	1.656 W
• in switching state ON	
— with bypass circuit	3.888 W
— without bypass circuit	3.888 W
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	vertical, horizontal
<b>fastening method</b>	screw fixing
<b>height</b>	230 mm
<b>width</b>	110 mm
<b>depth</b>	150 mm
<b>Ambient conditions</b>	
installation altitude at height above sea level maximum	3 500 m

<b>ambient temperature</b>	<ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> <li>• during transport</li> </ul>	-25 ... +55 °C -40 ... +70 °C -40 ... +70 °C
relative humidity during operation		5 ... 95 %
<b>Communication/ Protocol</b>		
<b>protocol is supported</b>		
<ul style="list-style-type: none"> <li>• PROFIBUS DP protocol</li> <li>• PROFINET protocol</li> </ul>	Yes Yes	
design of the interface PROFINET protocol	Yes	
<b>product function bus communication</b>		
protocol is supported AS-Interface protocol	No	
<b>product function</b>		
<ul style="list-style-type: none"> <li>• supports PROFlenergy measured values</li> <li>• supports PROFlenergy shutdown</li> </ul>	Yes Yes	
<b>address space memory of address range</b>		
<ul style="list-style-type: none"> <li>• of the inputs</li> <li>• of the outputs</li> </ul>	2 byte 2 byte	
type of electrical connection of the communication interface	via backplane bus	

<b>Connections/ Terminals</b>		
<b>type of electrical connection</b>		
<ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>	tab terminals	
<b>type of electrical connection</b>		
<ul style="list-style-type: none"> <li>• 1 for digital input signals</li> <li>• 2 for digital input signals</li> <li>• 3 for digital input signals</li> <li>• 4 for digital input signals</li> </ul>	M12 socket M12 socket M12 socket M12 socket	
<b>type of electrical connection</b>		
<ul style="list-style-type: none"> <li>• at the manufacturer-specific device interface</li> <li>• for main energy infeed</li> <li>• for load-side outgoing feeder</li> <li>• for main energy transmission</li> <li>• for supply voltage line-side</li> <li>• for supply voltage transmission</li> </ul>	optical interface socket according to ISO23570 socket according to ISO23570 socket according to ISO23570 via backplane bus via backplane bus	

<b>UL/CSA ratings</b>		
operating voltage at AC at 60 Hz according to CSA and UL rated value	600 V	

<b>Approvals Certificates</b>	
General Product Approval	EMV



Test Certificates	other	Dangerous goods	Environment
<a href="#">Type Test Certificates/Test Report</a>		<a href="#">Confirmation</a>	<a href="#">Transport Information</a> <a href="#">Environmental Confirmations</a>

<b>Further information</b>		
Information on the packaging		
<a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a>		
Information for data generation and storage		
<a href="https://support.industry.siemens.com/cs/ww/en/view/109995012">https://support.industry.siemens.com/cs/ww/en/view/109995012</a>		
Information- and Downloadcenter (Catalogs, Brochures,...)		
<a href="https://www.siemens.com/ic10">https://www.siemens.com/ic10</a>		
Industry Mall (Online ordering system)		
<a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1304-5LS40-4AA0">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1304-5LS40-4AA0</a>		

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RK1304-5LS40-4AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RK1304-5LS40-4AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=3RK1304-5LS40-4AA0&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RK1304-5LS40-4AA0&lang=en)

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

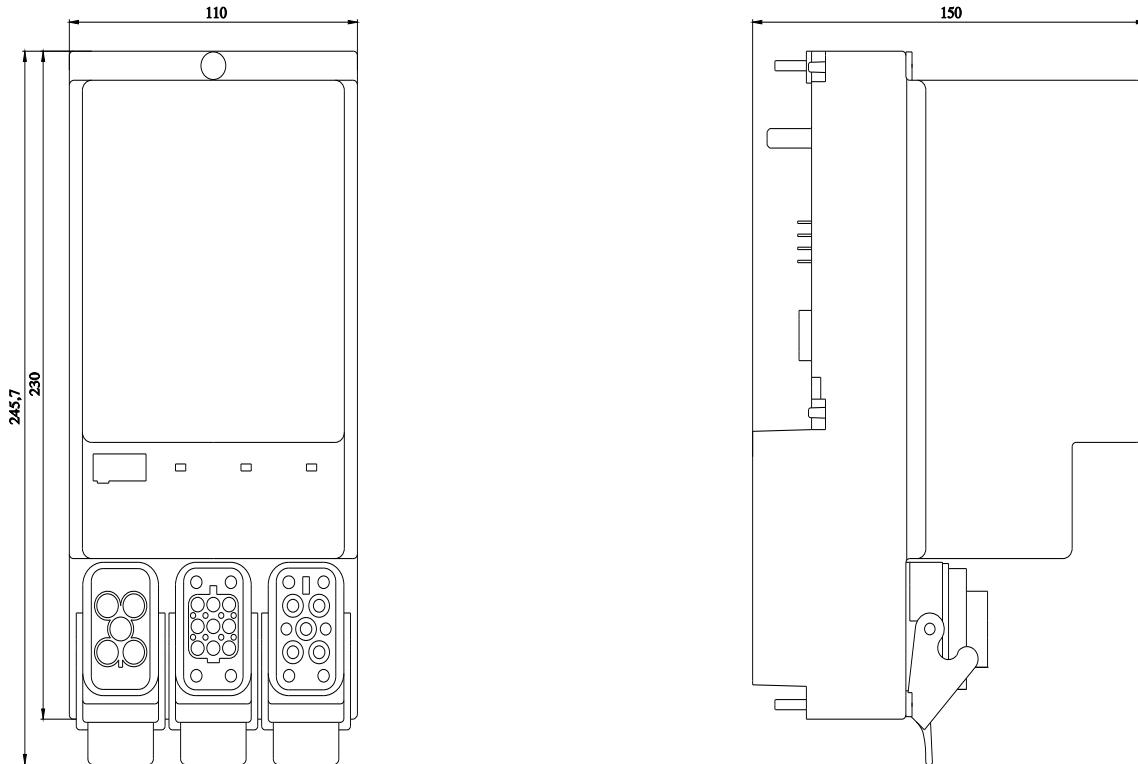

---

last modified:

4/1/2025