


### product type designation

product description

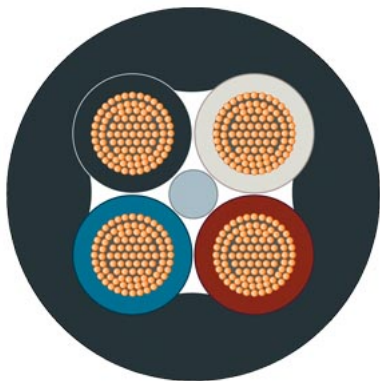

### Energy cable 4 x 1.5

Power cable (4-core), sold by the meter, unassembled

Energy cable, 4-core power line, stranded wire, 4x 1.5 mm<sup>2</sup>, trailable Delivery unit: max. 1000 m, minimum order quantity 20 m sold by the meter

Technical Product Detail Page

<https://l.siemens.com/1P6XV1801-2B>

suitability for use

connection of 24 V power supply

cable designation

LIYY 4X1X1.5 BK

### electrical data

operating voltage / RMS value

600 V

conductor cross section / of the power line

1.5 mm<sup>2</sup>

continuous current / of the power lines

16 A

### mechanical data

number of electrical cores

4

outer diameter

- of inner conductor
- of the wire insulation
- of cable sheath

1.6 mm  
2.3 mm  
7.7 mm

symmetrical tolerance of the outer diameter / of cable sheath

0.3 mm

conductor class

5

material

- of the conductor
- of the wire insulation
- of cable sheath

CU, blank  
PVC  
PVC

product component / PE connection

No

marking / of cores

Color

color

- of the power line insulation
- of cable sheath

brown / white / blue / black  
Black

bending radius

- with single bend / minimum permissible
- with multiple bends / minimum permissible
- with continuous bending

31 mm  
62 mm  
62 mm

number of bending cycles

2000000

tensile load / maximum

100 N

weight per length

97 kg/km

### ambient conditions

ambient temperature

- during operation
- during storage
- during transport
- during installation

-20 ... +90 °C  
-30 ... +90 °C  
-30 ... +90 °C  
-20 ... +90 °C

ambient condition / for operation	temperature range for permanent installation -30 °C to 90 °C
fire behavior	Flame-resistant acc. to IEC 60332-1-2
class of burning behaviour / according to EN 13501-6	Eca
chemical resistance <ul style="list-style-type: none"> <li>to mineral oil</li> <li>to grease</li> <li>to water</li> </ul>	Oil resistant according to EN 50290-2-22 (VDE 0819), compound type TM55 (7x24h/90 °C) Conditional resistance resistant according to UL 758 (75°C)
radiological resistance / to UV radiation	resistant

#### product features, product functions, product components / general

product feature <ul style="list-style-type: none"> <li>halogen-free</li> <li>silicon-free</li> </ul>	No Yes
--	-----------

#### standards, specifications, approvals

UL/ETL listing / 300 V Rating	Yes; c(ETL)us 3047254 CM 75°C
UL/ETL style / 600 V Rating	Yes; E502506 AWM STYLE 21216 90°C
certificate of suitability <ul style="list-style-type: none"> <li>EAC approval</li> <li>RoHS conformity</li> </ul>	wet-resistant according to UL Style 22374 Yes Yes

#### further information / internet links

internet link <ul style="list-style-type: none"> <li>to website: Selection guide for cables and connectors</li> <li>to web page: selection aid TIA Selection Tool</li> <li>to website: Industrial communication</li> <li>to web page: SiePortal</li> <li>to website: Image database</li> <li>to website: CAX-Download-Manager</li> <li>to website: Industry Online Support</li> </ul>	<a href="https://support.industry.siemens.com/cs/ww/en/view/109766358">https://support.industry.siemens.com/cs/ww/en/view/109766358</a> <a href="https://www.siemens.com/tstcloud">https://www.siemens.com/tstcloud</a> <a href="https://www.siemens.com/simatic-net">https://www.siemens.com/simatic-net</a> <a href="https://sieportal.siemens.com/">https://sieportal.siemens.com/</a> <a href="https://www.automation.siemens.com/bilddb">https://www.automation.siemens.com/bilddb</a> <a href="https://www.siemens.com/cax">https://www.siemens.com/cax</a> <a href="https://support.industry.siemens.com">https://support.industry.siemens.com</a>
---	---

#### security information

security information	Siemens provides products and solutions with industrial cybersecurity functions that support the secure operation of plants, systems, machines and networks. In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial cybersecurity concept. Siemens' products and solutions constitute one element of such a concept. Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place. For additional information on industrial cybersecurity measures that may be implemented, please visit <a href="https://www.siemens.com/cybersecurity-industry">www.siemens.com/cybersecurity-industry</a> . Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats. To stay informed about product updates, subscribe to the Siemens Industrial Cybersecurity RSS Feed under <a href="https://www.siemens.com/cert">https://www.siemens.com/cert</a> . (V4.7)
----------------------	---

#### Approvals / Certificates

General Product Approval	other	Environment
--------------------------	-------	-------------

[Manufacturer Declaration](#)

[Declaration of Conformity](#)



[Fire safety / Physical security](#)

[Miscellaneous](#)

[Environmental Conformations](#)

#### Industrial Communication

[PROFINET](#)

last modified:

10/29/2025

